




Manufactured by **DUO LIFT® Mfg. Co., Inc.**

Trailer Frame and Tank

**Model Shown: FH750D D.O.T. Compliant with 50" Enclosure, Gravel Guard and Aluminum Wheels**

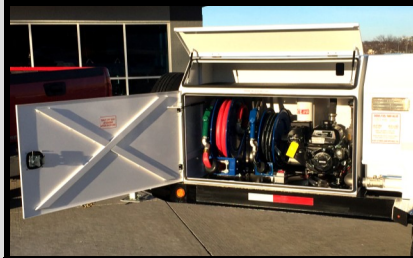

**Model Shown: FH750D D.O.T. Compliant with 50" Front Enclosure with Doors Open**

**Model Shown: FH750D D.O.T. Compliant with Rear Step, Handle, Platform and Placards**



|  | <u>MODELS:</u>       | <u>FH500 or FH500D</u> | <u>FH750 or FH750D</u>  | <u>FH990 or FH990D</u>  | <u>FH1000D</u>        |
|--|----------------------|------------------------|-------------------------|-------------------------|-----------------------|
|  | <b>GVWR:</b>         | 7,000 Lbs.             | 12,000 Lbs.             | 14,000 Lbs.             | 14,500 Lbs.           |
|  | <b>FRAME:</b>        | 6" Structural Channel  | 7" Structural Channel   | 7" Structural Channel   | 7" Structural Channel |
|  | <b>HIP TOP TANK:</b> | 500 Gallons w/Baffle   | 750 Gallons w/2 Baffles | 990 Gallons w/3 Baffles | Twin 500 Gallon Tanks |
|  | <b>LENGTH:</b>       | 15' 8"                 | 17' 6"                  | 19' 8"                  | 20'                   |
|  | <b>WIDTH:</b>        | 84"                    | 84"                     | 84"                     | 84"                   |
|  | <b>HEIGHT:</b>       | 72"                    | 72"                     | 72"                     | 72"                   |
|  | <b>EMPTY WEIGHT:</b> | 2,500Lbs. - 3,000 Lbs. | 3,500 Lbs. - 4,000 Lbs. | 4,200 Lbs. - 4,500 Lbs. | 5,000 Lbs.            |

### Standard Features - All Models

- H.D. Structural Channel Frame
- Flat Tank Support Platform
- Under Slung Slipper Springs
- Adjustable Height Hitch Channel
- (2) D.O.T. Rated Safety Tow Chains
- Front Platform Area
- Rear Platform, Rear Step and Grab Handle
- Tongue Jack
- White Color, 3/16" Steel Hip Top, Spring Cushioned Tank and (2) Roll Guards
- Bottom Tank Drain Port
- Side Access 2" S.S. Tank Valve
- (2) 2" Lockable Pre-Vent Fill Caps
- Tank Vent
- Stainless Steel Fuel Gauge and Guard
- (4) Fuel Placards
- Bolt-On Hose Stand with Nozzle Holder
- Operators Manual & Canister

### Standard Features - Off Road Models (Available in the USA and Not Available in Canada)

- Black Color Trailer
- 8 Bolt Hubs
- 8 Bolt Wheels
- 235/80R16 E Tires
- Single Axle (FH500)
- Tandem Axle (FH750 - FH990)
- SMV Sign
- Steel Fenders
- Adj. Height Clevis Hitch, Accepts 1" Hitch Pin
- Off Road Trailer Serial Number
- Reflective Tape

### Standard Features - FH500D, FH750D, FH1000D ( D.O.T. Compliant )

- Black Color Trailer
- Tandem Axles
- Rear Trailer Bumper
- Flat Top Steel Fenders with Rubberized Front Coating
- Splash Guards
- 2-5/16" Adjustable Height Ball Coupler
- Highway Rated Hubs
- Highway Rated White Spoke Wheels:
  - 15" x 6" - 6 on 5.5" (FH500D)
  - 16" x 6" - 8 on 6.5" (FH750D-FH1000D)
- Highway Rated Tires:
  - 225/75R15D Tires (FH500D)
  - 235/80R16E Tires (FH750D-FH1000D)
- Four Wheel Electric Brakes with Breakaway Kit
- Highway Lighting Package with Wiring in Conduit or Loom and 7-Way RV Electrical Connector
- D.O.T. Conspicuity Tape and Safety Signs
- 17 Digit VIN and ID Plate, Manufacturers Statement of Origin & First Yr. Federal Inspection

### Optional Features

- 20 - 25 GPM, 12V Diesel Pump w/10 Micron Filter, 25' Hose, Swivel with Auto Nozzle, and 30' Power Cord with Battery Clamps
- 30 - 35 GPM, Kohler Gas Engine Powered Diesel Pump w/10 Micron Filter, 25' Hose Reel, Swivel and Auto Nozzle
- 40 - 55 GPM, Kohler Gas Engine Powered Diesel Pump, (2) 10 Micron Filters, 50' Hose Reel, Swivel, Auto Nozzle and Nozzle Holder
- 35' Diesel Hose Reel with Nozzle Holder, Swivel & Auto Nozzle
- In-Line Diesel Fuel Meters, 30 GPM or 50 GPM Capacity
- 50, 80 or 100 Gallon 12V D.E.F. System, 120V DEF Tank Heater Blanket, DEF Filter
- D.E.F. Transfer System for Pumping DEF onto Trailer
- Rear Fenders for OFF ROAD Models
- 25' D.E.F. Reel with Nozzle Holder with Drip Containment, Swivel and Auto Nozzle
- In-Line Digital D.E.F. Meter
- 50" Front or 50" Rear Enclosure with Lockable Top, Side and Rear Doors
- Aluminum Diamond Plate Gravel Guard for Front of Enclosure & Front of Fenders
- Spare Tire, Spare Tire Carrier and Spare Tire Cover
- 12V Covered Power Socket with LED Dome Light and 12V LED Spot Light
- Light Package (FH500-FH750-FH990 Off Road Models)
- Aluminum 16" - 8 Bolt Wheels
- Blue, Green, Red or Yellow Paint Color for Tank or Trailer
- Ag Light Package for OFF ROAD Models



FH500 OFF ROAD



12V, 20 - 25 GPM Diesel Pumping System with 50 Gallon D.E.F. Tank




Optional 50, 80 or 100 Gallon D.E.F. Systems. (100 Gallon Shown). Optional 120V 835 Watt, Auto Temperature Controlled, D.E.F. Tank Heater Blanket (40°F to -10°F Operational Temperature) with External Covered 120V Electrical Socket. Factory or Field Installed.



FH750D with Red and Black Color Option.



Kohler Powered 30 - 35 GPM Diesel Pumping System with 50 Gallon D.E.F. Tank.

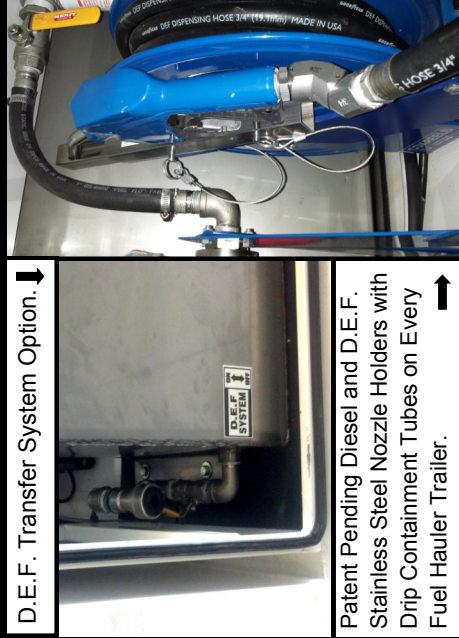

D.E.F. Transfer System Option. ↓

Patent Pending Diesel and D.E.F. Stainless Steel Nozzle Holders with Drip Containment Tubes on Every Fuel Hauler Trailer. →




FH990D with Green Color Option.



Kohler Powered 40 - 55 GPM Diesel Pumping System with 80 Gallon D.E.F. Tank.



50" Front Enclosure Option.

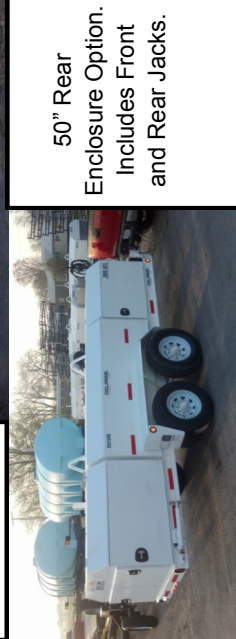

50" Rear Enclosure Option. Includes Front and Rear Jacks.

**DUO LIFT** Manufacturing Company, Inc.

2810 38th Street • Columbus, Nebraska 68601

Phone: 402-564-8023 • FAX: 402-564-5385

Toll Free: 1-800-243-2583

Email: sales@duolift.com

Website: www.duolift.com

Authorized Dealer: